


# RH F Series Two & Three-Phase 100 Amp Solid State Power Controller



- SCR output, two and three-phase panel mount solid-state relay Power Controller
- Output ratings up-to 100 amps per-phase @ 40°C ambient temperature
- Forced-air cooled heat sink to maximize overall product life expectancy
- Includes 90°C thermal cutout switch
- Direct-bond copper (DBC) substrate for superior thermal performance
- Epoxy free design eliminates stress on internal components due to epoxy expansion and contraction
- Ideal replacement for mercury three-phase contactors
- MTBF > 7 million hours (>800 years)
- Touch-safe cover
- EMC compliant, level 3
- Agency approvals (SSR and Fan); UL, CSA, VDE/TUV, and CE

## Series Nomenclature

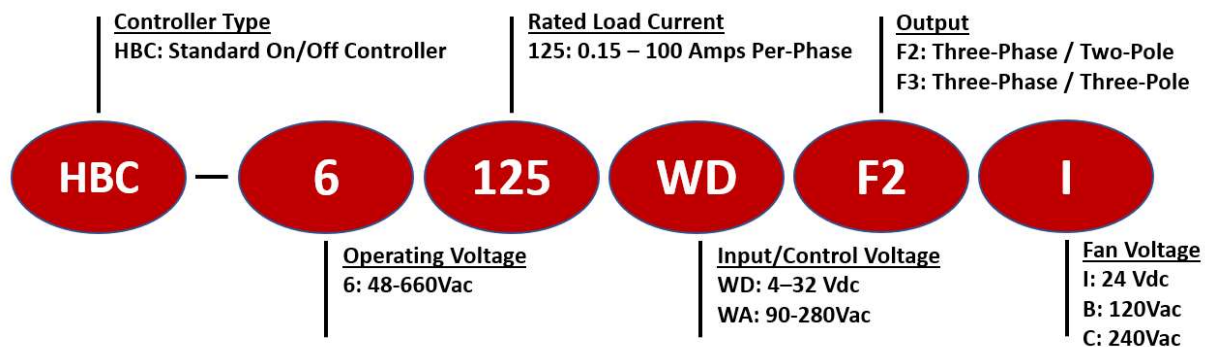

## Output Specifications

Part Number:	HBC-6125WxF2x	HBC-6125WxF3x
Output Type	3-Phase / 2-Pole	3-Phase / 3-Pole
Operating Voltage (Vrms; 47-440Hz)	48-660	48-660
Load Current Range (Amps RMS Per--Phase)	.15 – 100	.15 - 100
Transient Overvoltage (Vpk)	1200	1200
Max. Surge Current (Apk; 50/60Hz)	1900 / 2000	1900 / 2000
Max. On-State Voltage Drop (Vrms)	0.9	0.9
Max I <sup>2</sup> T for Fusing (A <sup>2</sup> S; 50/60Hz)	18000 / 16600	18000 / 16600
Max. Off-State Leakage Current (mArms)	1	1
Min. Power Factor with Max. Load	0.5	0.5



# RH F Series Two & Three-Phase 100 Amp Solid State Power Controller

## Input Specifications

Part Number:	HBC-6125WDFx	HBC-6125WAFx
Control Voltage Range	4-32Vdc	90-280Vac
Minimum Turn-On Voltage	4Vdc	90Vac
Must Turn-Off Voltage	1Vdc	10Vrms
Input Current Range (mA)	10 - 15	6 - 10
Nominal Input Impedance	Current Regulated	
Maximum Turn-On / Turn-Off Time (msec)	½ AC Cycle	20 / 30

## General Specifications

Description	Specification
Dielectric Strength (Input/Output/Heat Sink)	4,000 Vrms
Ambient Operating Temperature Range	-40 to +80 °C
Weight *	4.1 lbs (1.86 kg) (2-phase) / 4.3 lbs (1.95 kg) (3-phase)
Solid State Relay Housing Material	UL94 V-0 Polymers
Heat Sink Material	Aluminum
Input Terminal Screw Torque Range (in-lb/Nm)	13-15 / 1.5-1.7
Load Terminal Screw Torque Range (in-lb/Nm)	18-20 / 2.0-2.2
MTBF (Mean Time Between Failures) @ 40°C ambient	~11 Million Hours (>1,300 years)
MTBF (Mean Time Between Failures) @ 60°C ambient	~7 Million Hours (>800 years)

\* Weight given for "I" version with a 24Vdc fan. Add 0.8 lbs (363 g) for "B" or "C" version (120Vac or 240Vac fan, respectively)

## Available Options

- 10 Random/Instantaneous turn-on (inductive or phase-control applications)
- M MOV (metal oxide varistor) overvoltage protection
- E 24Vac control voltage (AC input only)
- TP Through-panel mounting
- CT Current transducer

## Input Options (Change HBC- prefix to TP, TPLP or LPC prefix)

- TP** Burst fire (time proportioning) controller. Analog Input; 0-10Vdc, 0-5Vdc, 2-10Vdc, 1-5Vdc, 4-20mA, potentiometer or 0-135Ω rheostat (TP135 prefix). 24Vac power supply required (optional HBCcontrols PS series if 24Vac supply is not available)
- TPLP** Burst fire loop (time proportioning loop) controller. Analog Input; 4-20mA (24Vac supply not required)
- LPC** Linear phase-angle controller. Analog Input; 0-10Vdc, 0-5Vdc, 2-10Vdc, 1-5Vdc, 4-20mA, potentiometer or 0-135Ω rheostat (LPC135 prefix). 24Vac power supply required (optional HBCcontrols PS series if 24Vac supply is not available)

# RH F Series Two & Three-Phase 100 Amp Solid State Power Controller

