

# UXK Series

## 70 Amp Solid-State Power Controller



- SCR output DIN mount solid-state relay / heat sink assembly
- Output ratings up-to 70 amps @ 40°C ambient temperature
- IP20 touch-safe housing with removable flaps over the input and output terminals
- Green LED input status indicator
- Thermally efficient heat sink to maximize overall product life expectancy
- Direct-bond copper (DBC) substrate for superior thermal performance
- Epoxy free design eliminates stress on internal components due to epoxy expansion and contraction
- Direct-power lead-frame design reduces solder joints and enhances reliability
- EMC compliant, level 3
- Solid-state relay approvals: cURus, VDE/TÜV, and CE

Input / Output Specifications	DC Input / Control			AC/DC Input / Control
	U90HDXK	U125HDXK	U90HDXK-10	U90HAXK
Part Number: HBC -	U90HDXK	U125HDXK	U90HDXK-10	U90HAXK
Operating Voltage (Vrms; 47-440Hz)	24-510	24-510	24-510*	24-510
Load Current Range (Amps RMS)	.15 – 60	.15 – 70	.15 - 60	.15 - 60
Output Switching Type	Zero-Cross	Zero-Cross	Instantaneous	Zero-Cross
Celduc Solid-State Relay Utilized	SO968470	SO869070	SO768090	SO967940
Output Over Voltage Protection	Varistor	Varistor	Varistor + RC	TVS
Transient Overvoltage (Vpk)	950	950	950	1100
Max. On-State Voltage Drop (Vrms @ Imax)	1.1	1.1	1.1	1.2
Max. Surge Current (Apk; 50/60Hz)	1800/1890	2100/2205	1800/1890	1200/1256
Max I <sup>2</sup> T for Fusing (A <sup>2</sup> S; 50/60Hz)	16200/14880	22000/20177	16200/14880	7200/6573
Max. Off-State Leakage Current (mArms)	1.0	1.0	5.0	1.0
Input / Control Voltage Range	3.5-32Vdc	3.5-32Vdc	3.5-32Vdc	20-265Vac/dc
Input Current Range (mA)	10-13	10-13	10-13	5-10
Max. Turn-On/Turn-Off Time (msec)	½ AC Cycle	½ AC Cycle	0.1 / ½ Cycle	30 / 30
Input Over Voltage Protection	TVS	TVS	TVS	None

\*HBC-UxxHDXK-10 line frequency range limited to 100Hz due to output RC snubber network

# UXK Series

## 70 Amp Solid-State Power Controller



### General Specifications

Description	Specification
Dielectric Strength (Input/Output/Heat Sink)	4,000 Vrms
Ambient Operating Temperature Range	-40 to +80 °C
Weight	1.5 lbs (680 g)
Solid State Relay Housing Material	UL94 V-0 Polymers
Heat Sink Material	Aluminum
Input Terminal Screw (M4) Torque Range (in-lb/Nm)	13 - 17 / 1.5 - 2.0
Load Terminal Screw (M5) Torque Range (in-lb/Nm)	21 - 26 / 2.4 - 3.0

### Available Options (Suffix at end of part number)

- M MOV (metal oxide varistor) overvoltage protection
- TP Through-panel mounting
- PM Panel mounting
- ND Without DIN rail clip
- CT Current transducer
- 2 Two-pole configuration (for three-phase loads)
- 3 Three-pole configuration (for three-phase loads)
- WH Wiring harness for multiple pole configurations

### Nomenclature Examples:



HBC-U90HDXX with MOV = HBC-90HDXX-M

Two-Pole HBC-U90HDXX with Wire Harness = HBC-U90HDXX-2-WH

# UXK Series 70 Amp Solid-State Power Controller



## Derating Curves:

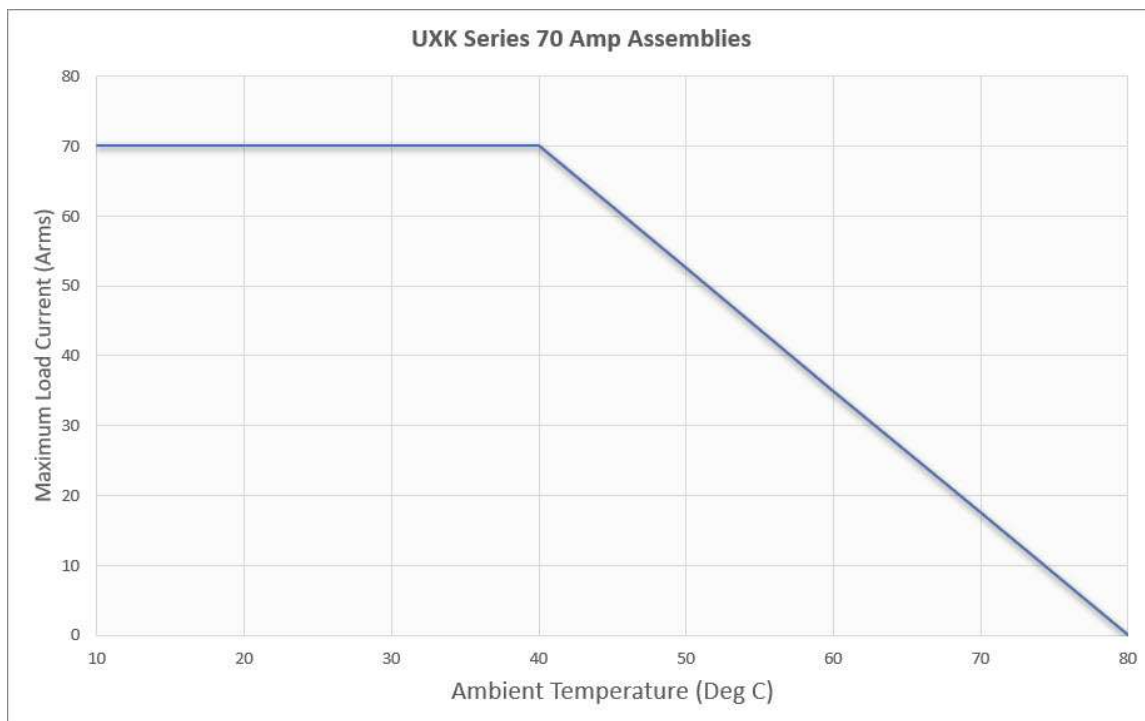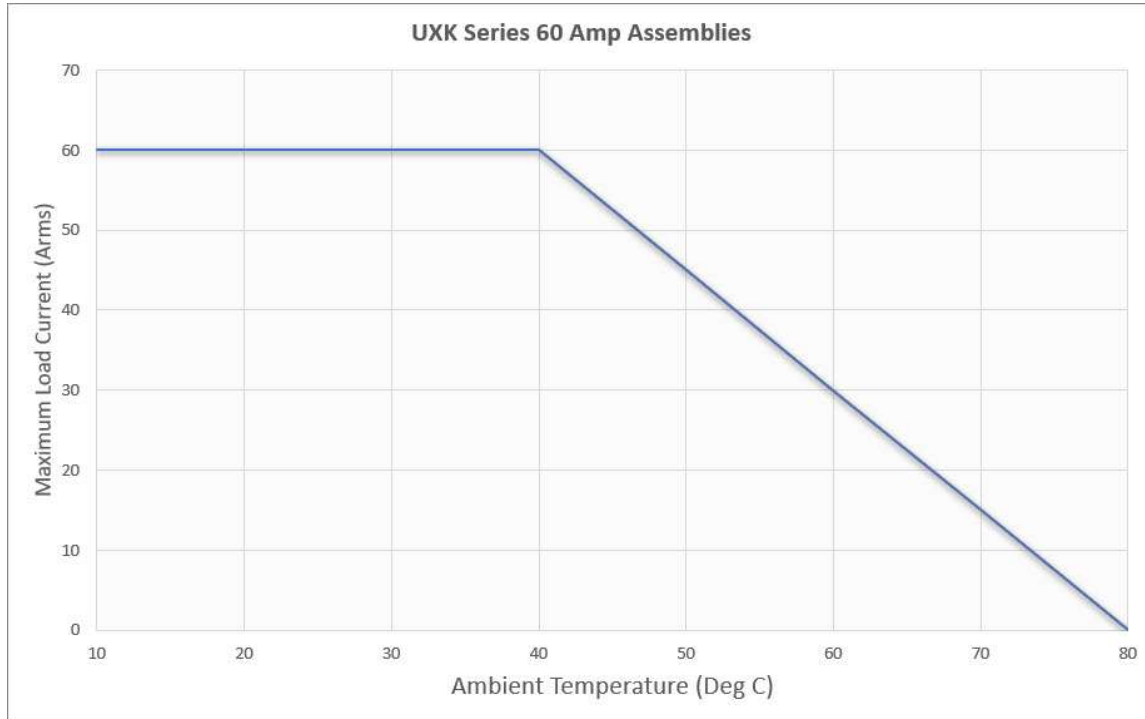

# UXK Series

## 70 Amp Solid-State Power Controller




### Termination Specifications:

#### Input / Output Connections:

##### Input Connections (1 or 2 wires):

###### Solid Wire – No Ferrule



14 AWG – 18 AWG  
0.75 mm<sup>2</sup> – 2.5 mm<sup>2</sup>

###### Stranded – W/Ferrule\*




14 AWG – 18 AWG  
0.75 mm<sup>2</sup> – 2.5 mm<sup>2</sup>



##### Output Connections (1 or 2 wires):

###### Solid Wire – No Ferrule



8 AWG – 16 AWG  
1.5 mm<sup>2</sup> – 10.0 mm<sup>2</sup>

###### Stranded – W/Ferrule\*



8 AWG – 16 AWG  
1.5 mm<sup>2</sup> – 10.0 mm<sup>2</sup>



\* Termination with stranded wires without ferrules is not recommended


#### Load Terminal Connection with Ring Terminals:

**Max. Width = 0.5" / 12.6mm**

Suggested narrow tongue compression terminal lugs for applications with large power conductors:\*



- 6 AWG / 16 mm<sup>2</sup> = Burndy YA6CLBOX
- 4 AWG / 25 mm<sup>2</sup> = Burndy YA4CLBOX
- 2 AWG / 35 mm<sup>2</sup> = Burndy YA2CLNT14
- 1 AWG / 50 mm<sup>2</sup> = Burndy YA1CLNT14

\* Correct terminal selection may depend upon multiple application factors. It is the responsibility of the end user to determine whether these or similar terminals are suitable for use in their applications. Please review terminal specifications carefully to ensure suitability for use within the application.

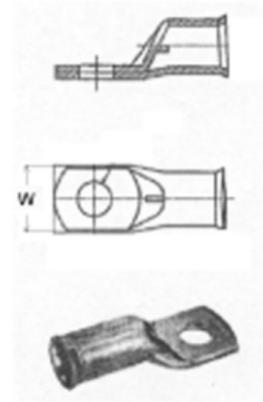

# UXK Series

## 70 Amp Solid-State Power Controller

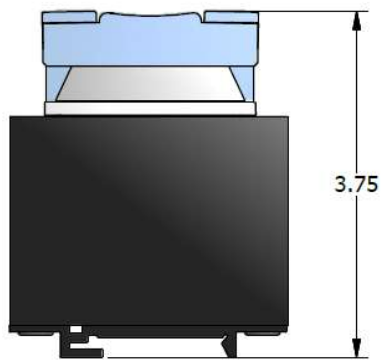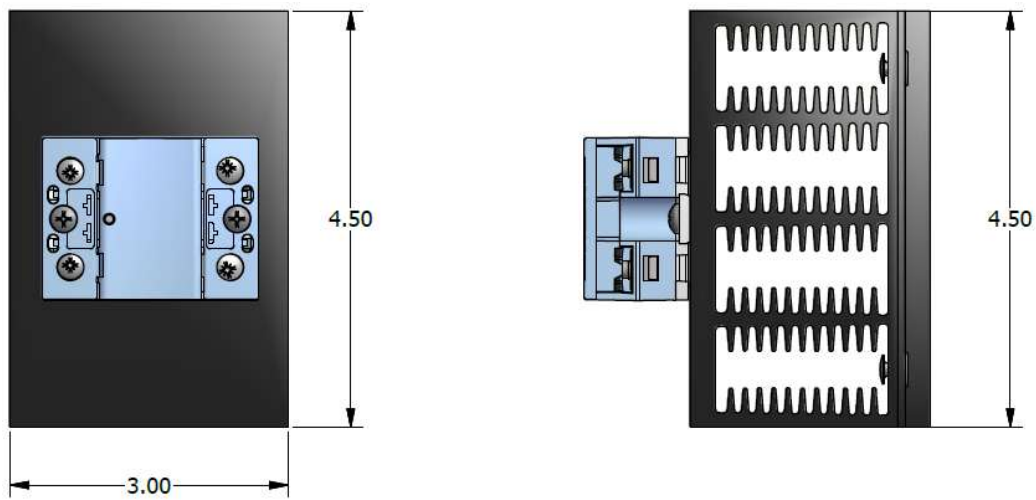

### Two-Pole Assembly (-2 Suffix)

